

XSRS17E

Function:

Rod seals are designed to seal the pressurized hydraulic fluid against the atmosphere, preventing leakage and pollution of the environment.

Features:

- Asymmetrical, single acting rod seal, designed with interference on the OD which provides a good static fit in the groove.
- Special design for small cross sections where lips would be too thin.
- Secondary lip for stabilising at large seal heights and reducing the residual oil film.
- Activated back-up ring prevents and reduces gap extrusion.
- Excellent static and dynamic sealing performance.
- Excellent performance over all pressure ranges.
- Used for short pulsating strokes.
- No reverse leakage when changing direction.
- Recommended for positioning or holding under pressure.
- Particularly suitable for high viscosity media.

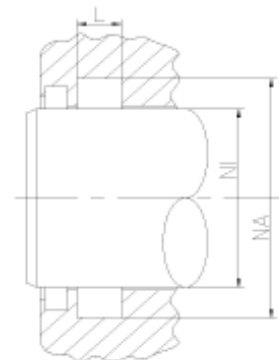
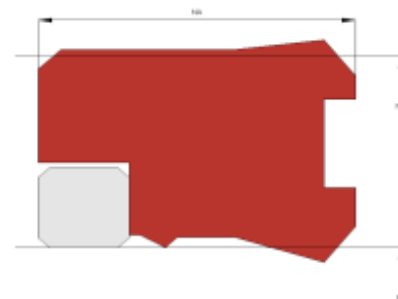
Application:

Reciprocating pistons/rods in hydraulic cylinders, push rods, fittings etc.

Switching or clamping functions.

Replacement for rubber fabric seals.

Max. pressure 400 bar, max. speed 0.3 m/s.

**Seal housing recommendation:**

Tolerances	[mm]	
L < 10mm	+0.2	
L ≥ 10mm	+0.3	
∅ NA	H10	
∅ NI	f 8	

Surface roughness	Rtmax [μ]	Ra [μ]
Bottom of groove	≤ 6.3	≤ 1.6
Face of groove	≤ 15	≤ 3

Sliding surface	Rtmax [μ]	Ra [μ]
PU, elastomeres	≤ 2.5	≤ 0.1 - 0.5
PTFE	≤ 2	≤ 0.05 - 0.3

Installation:

Snap-in installation.

We recommend to maintain a nominal width/seal height ration (CS/NH) above 1/1,25.