

Function:

Piston seals are designed to seal the pressurized hydraulic fluid against the atmosphere or between two pressurized spaces.

Features:

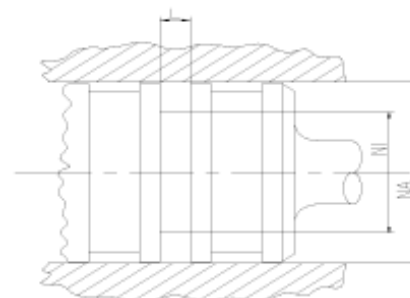

- Asymmetrical, double acting piston seal, designed with interference of the O-Ring on the ID and slight interference of the glide ring on the OD.
- Glide ring in very wear resistant hard grade polyurethane (PU-D57).
- Excellent sealing performance in low and high speeds.
- Suitable for positioning and holding functions.
- Negligible tendency to “stick-slip” effect.
- Low break-away load after long standstills.
- Good gap extrusion resistance.

Application:

Reciprocating pistons in hydraulic cylinders, plungers.

Dynamic seals in hydraulic systems.

Max. pressure 250 bar, max. speed 1 m/s

**Seal housing recommendation:**

Tolerances	[mm]	
L < 10mm	+0.2	
L ≥ 10mm	+0.3	
Ø NA	H8	
Ø NI	h8	

Surface roughness	Rtmax [μ]	Ra [μ]
Bottom of groove	≤ 6.3	≤ 1.6
Face of groove	≤ 15	≤ 3

Sliding surface	Rtmax [μ]	Ra [μ]
PU, elastomeres	≤ 2.5	≤ 0.1 - 0.5
PTFE	≤ 2	≤ 0.05 - 0.3

Installation:

Snap-in installation