

XSRS17D

Function:



Rod seals are designed to seal the pressurized hydraulic fluid against the atmosphere, preventing leakage and pollution of the environment.

Features:

- Asymmetrical, single acting rod seal, designed with interference on the OD which provides a good static fit in the groove.
- Special design for small cross sections where lips would be too thin.
- Secondary lip for stabilising at large seal heights and reducing the residual oil film.
- Excellent static and dynamic sealing performance.
- Excellent performance over all pressure ranges.
- Used for short pulsating strokes.
- No reverse leakage when changing direction.
- Recommended for positioning or holding under pressure.
- Particularly suitable for high viscosity media.

Application:

Reciprocating pistons/rods in hydraulic cylinders, push rods, fittings etc.
Switching or clamping functions.
Replacement for rubber fabric seals.

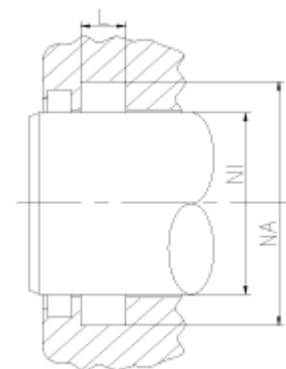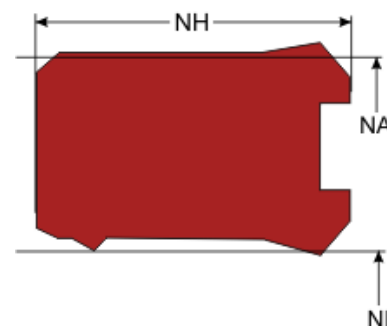

max. speed	max. pressure	material
0.5 m/s	400 bar (40 MPa)	all HPU typen
0.7 m/s	400 bar (40 MPa)	HPU94 GM
0.5 m/s	160 bar (16 MPa)	all Elastomer types

For higher speed or pressure please ask our technical department.

Seal housing recommendation:

Tolerances	[mm]	
L < 10mm	+0.2	
L ≥ 10mm	+0.3	
Ø NA	H10	
Ø NI	f 8	

Surface roughness	Rtmax [μ]	Ra [μ]
Bottom of groove	≤ 6.3	≤ 1.6
Face of groove	≤ 15	≤ 3

Sliding surface	Rtmax [μ]	Ra [μ]
PU, elastomeres	≤ 2.5	≤ 0.1 - 0.5
PTFE	≤ 2	≤ 0.05 - 0.3

Installation:

Snap-in installation.